

Wall and ceiling luminaire WDL 450

Introduction

This mounting instruction will help you with the

- intended and
- safe

mounting of the wall and ceiling luminaire WDL 450 and components
the subsequent usage and disposal of the wall and ceiling luminaire and components.

Duties with the handling of this mounting instruction

Every person who

- installs
- cleans or
- disposes

the wall and ceiling luminaire WDL 450 must have read and understood the complete content of the present mounting instruction. Please store this mounting instruction safely and ready to hand. In case of passing on the wall and ceiling luminaire and components, please also hand over the mounting instruction.

Intended use

The wall and ceiling luminaire WDL 450 may only be mounted on a stable and sufficiently supporting underground. The wall and ceiling luminaire WDL 450 is rated IP54, i.e. it is protected against splashing water from all directions. The wall and ceiling luminaire is not intended for other areas. Intended use also means that all the information in this mounting instruction, especially the safety instructions must be followed. Any other usage is to be considered as no intended use and may lead to material damage or personal injury. MGL Licht does not assume any liability for damages that result from improper use.

General safety instructions

Danger due to insufficient qualification

The mounting, installation, commissioning, maintenance, repair, decommissioning and dismantling may only be carried out by expert technicians (e.g. electrical contractors) who are sufficiently qualified and who consider all product-related instructions, relevant directives, standards, laws and other provisions.

Mounting instructions of other devices or components that are mounted or operated in connection with the wall and ceiling luminaire, must also be taken into account.

Danger to life due to electric shock

In case you touch live components, there is danger of life due to electric shock. Before starting any work on the product, please disconnect the product by switching off all power supplies and secure it against being switched on again.









Disposal




All electrical and electronic equipment waste must be disposed of separately from household waste via the specially provided collection points. By a proper disposal of your old device you avoid any environmental damage. Further information about the disposal can be obtained from your local authorities or from the retailer you purchased the product from.

The packaging and packaging material consist only of environmentally friendly materials. It can be disposed of at the local Recycling Collection Points. Please contact your local responsible authority for information about the possibilities of recycling or of other safe and environmentally neutral disposal.

i		Product code	Product description
		MGL4040	WDL 450, Farbtemperatur umschaltbar 3000/4000K 230V 50/60Hz, IP44
		MGL4041	WDL 450, dimmbar DALI Farbtemperatur umschaltbar 3000/4000K 230V 50/60Hz, IP44
		MGL4046*	WDL 450, Leistung umschaltbar Farbtemperatur umschaltbar 3000/4000K 230V 50/60Hz, IP44

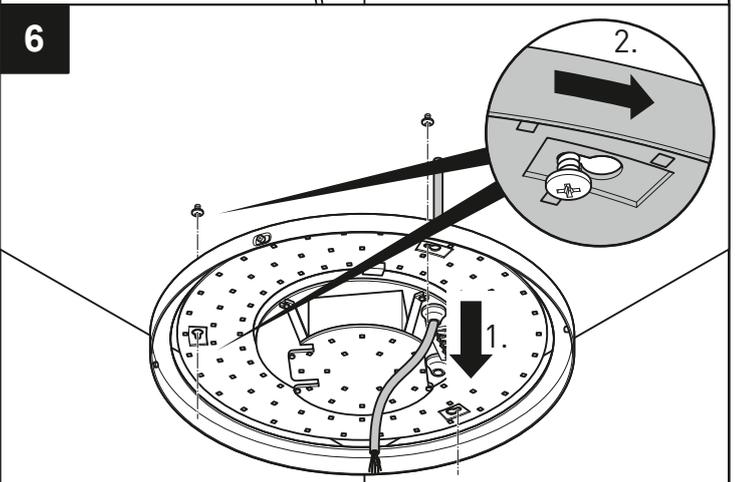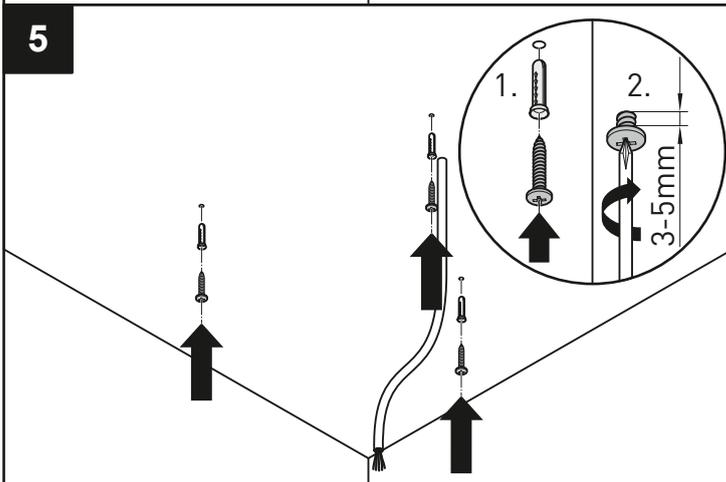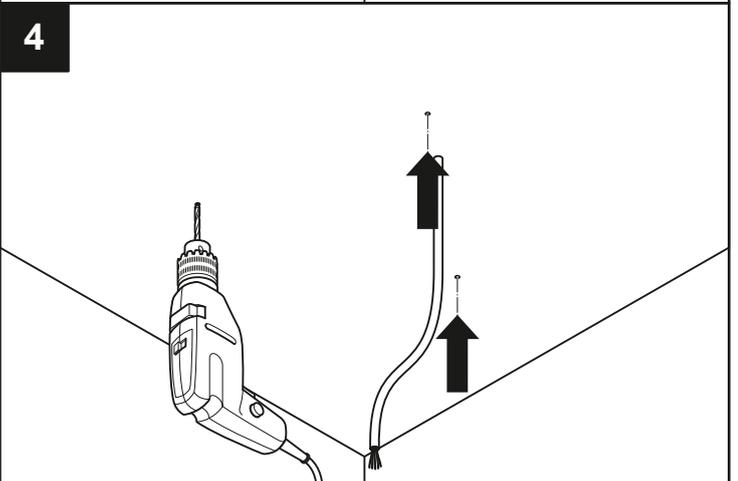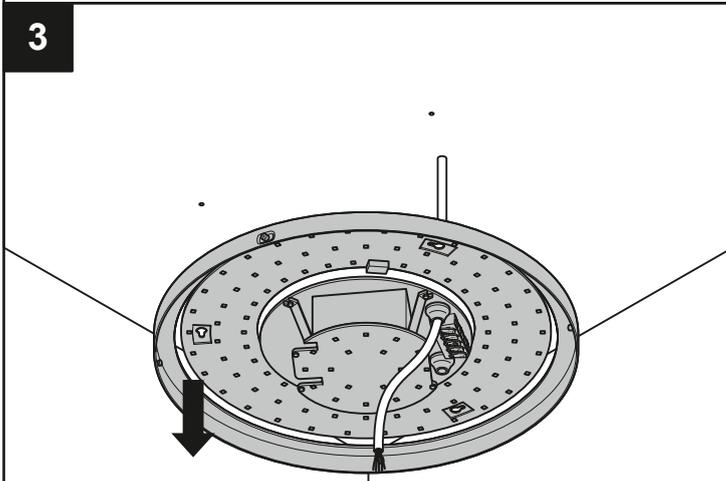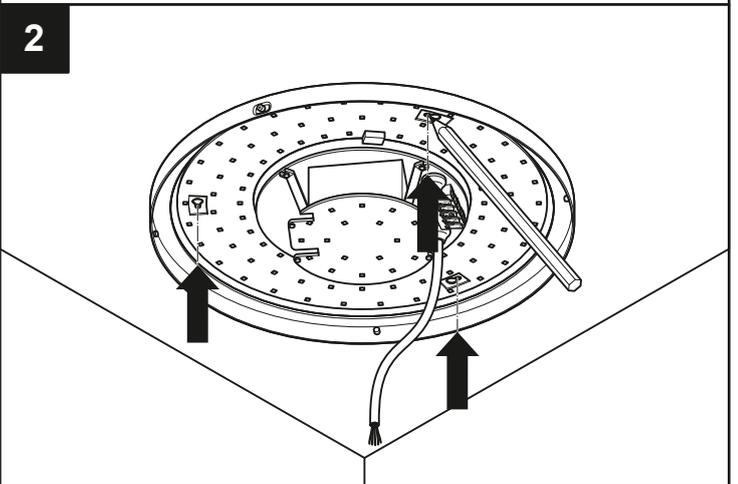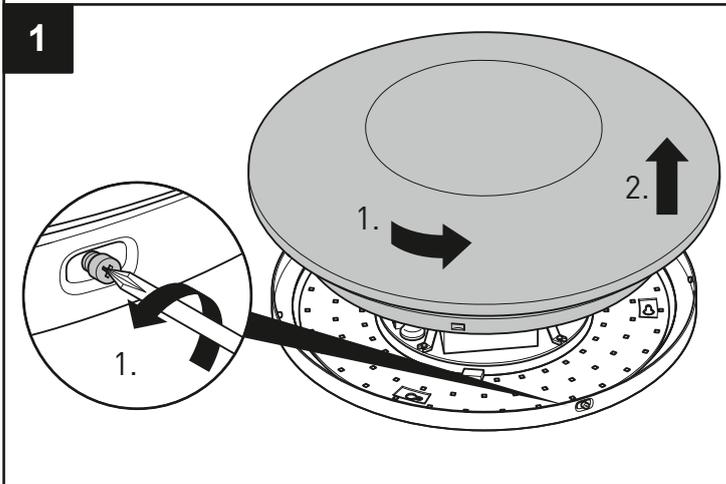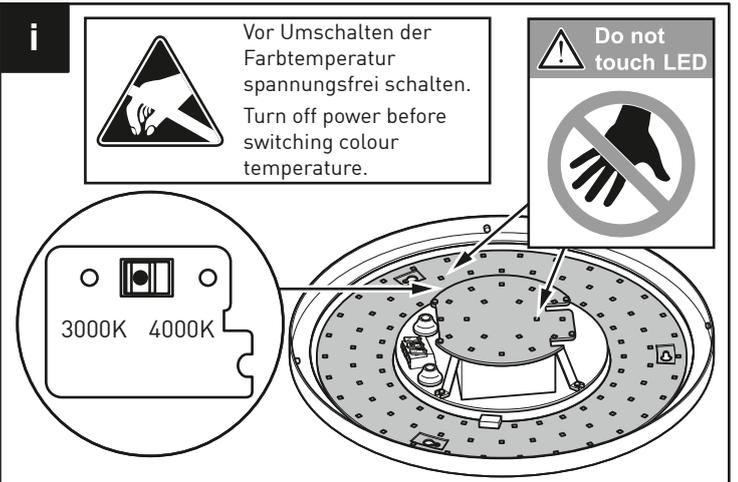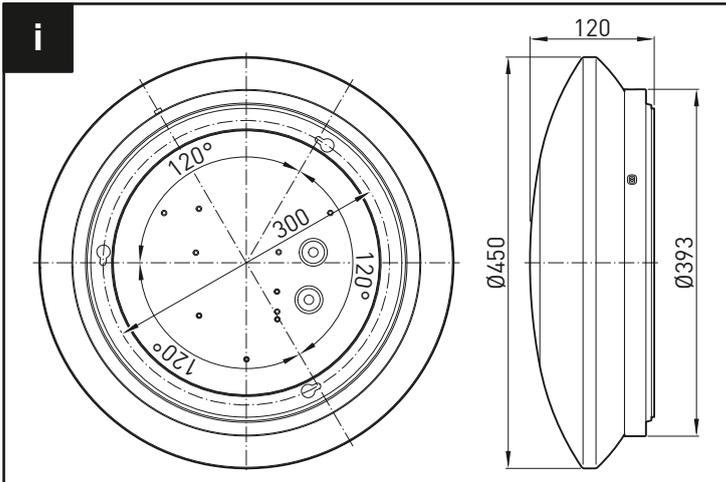


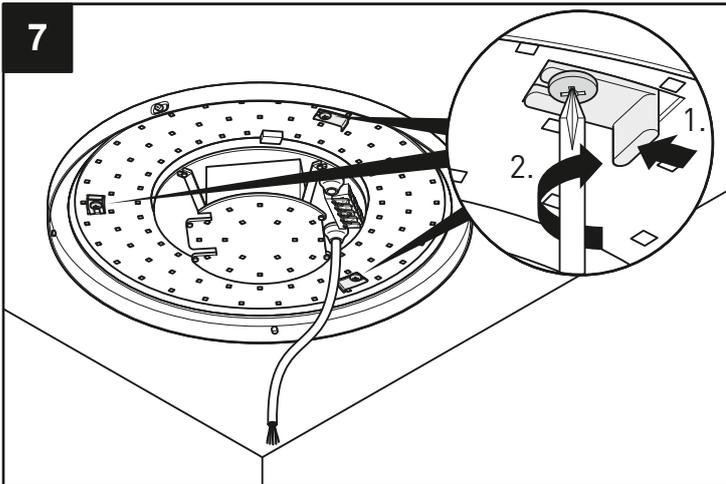



i * DIP Switch

	1	2	3	4	
ON					300mA 12W
ON					500mA 20W
ON					700mA 27W
ON					900mA 34W

MGL4046 *

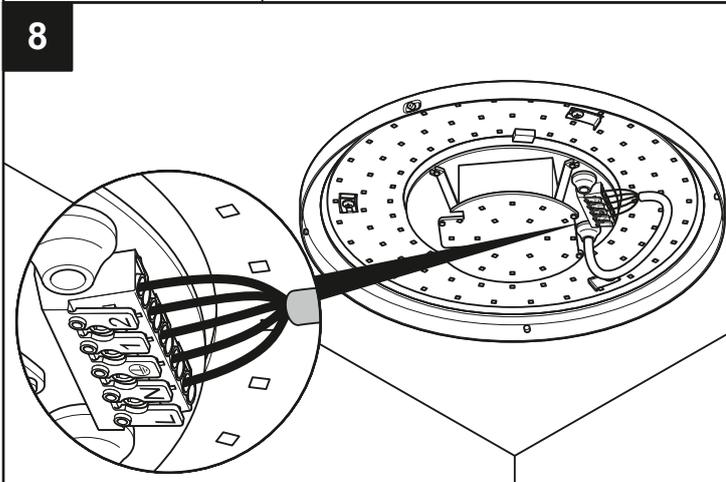

	MGL4040 MGL4046*	
	MGL4041	

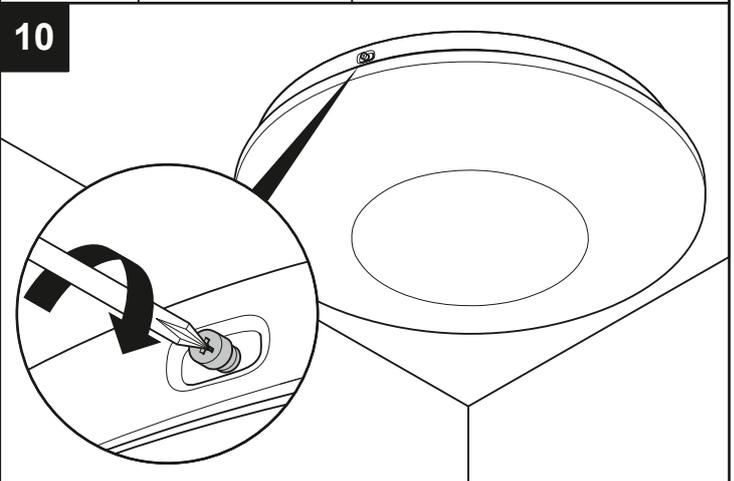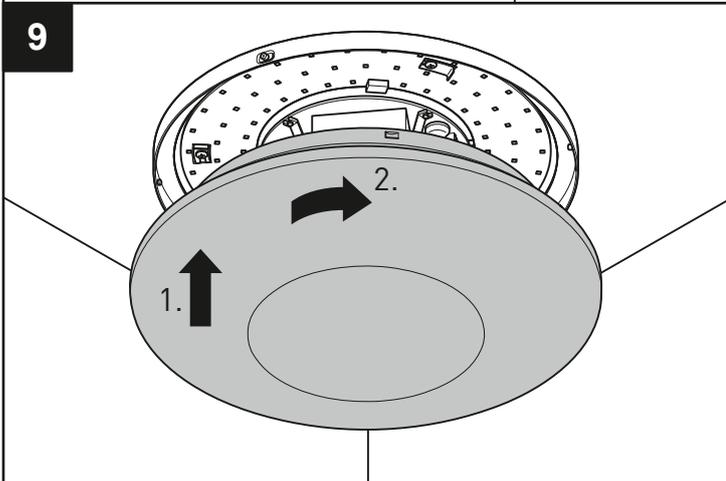

Die technischen Inhalte entsprechen dem Stand der Drucklegung.

Änderungen bleiben vorbehalten.

Keine Gewährleistung für Druckfehler oder Irrtümer.

All technical information is correct at the date of printing.

This mounting instruction is subject to change without notice.

No liability is taken for any print errors or mistakes.

MGL LICHT GmbH
Lagesche Straße 72
32657 Lemgo
Germany

Tel.: +49/(0)5261/934758-0
Fax: +49/(0)5261/934758-199

E-Mail: info@mgl-licht.de
Internet: www.mgl-licht.de